

FUMIGANT SAFETY MONITORING



Fumigation and quarantine are frequent mandatory procedures applying to oversea shipments of agriculture or forestry products. Safety and health requirements in the proximity of the fumigation process often require accurate and reliable gas monitoring of chemical compounds that are toxic even at trace levels.

The Challenge

Occupational exposure risks exist with most fumigation substances. Sensitive and reliable gas monitoring is often required in standard operating procedures for worker protection.

In the agriculture and forestry market, producers rely heavily on fumigation to reduce the business risk that would represent losing even a part of their production from biological destruction by nematodes, weeds, insects, fungus, etc.

However, most substances used as fumigants also raise occupational exposure toxicity issues for the actual user (the fumigator). They are also potentially hazardous for bystanders, neighbors, or the local environment.

As a consequence, the registration process of a new substance as a fumigant requires a demonstration of the availability and effectiveness of a gas monitoring method capable of reliable detection and alarming upon hazardous level of the substance.

Monitoring Needs


Recently, LumaSense Technologies has worked in partnership with a major industry player which drives

the development of Ethanedinitrile (abbreviated EDN) as an alternative fumigation substance in replacement of the Methylbromide (Bromomethane) that is being phased out because it was determined to be an ozone depleting agent.

EDN has a high toxicity potential and the permissible exposure limit (PEL) is set at 10 ppm by the US OSHA or by the German DFG MAK. The hazardous conditions are also linked to some degradation products: when released in air, the EDN is also partly hydrolyzed to HCN (hydrogen cyanide).

Because of its PEL of 10 ppm, its industrial promoter targeted analytical methods with a low detection limit of no more than 1 ppm for the EDN substance.

Other important operational requirements for instruments are robustness, user-friendliness, and the ability to be easily deployed in field conditions by non-experts.

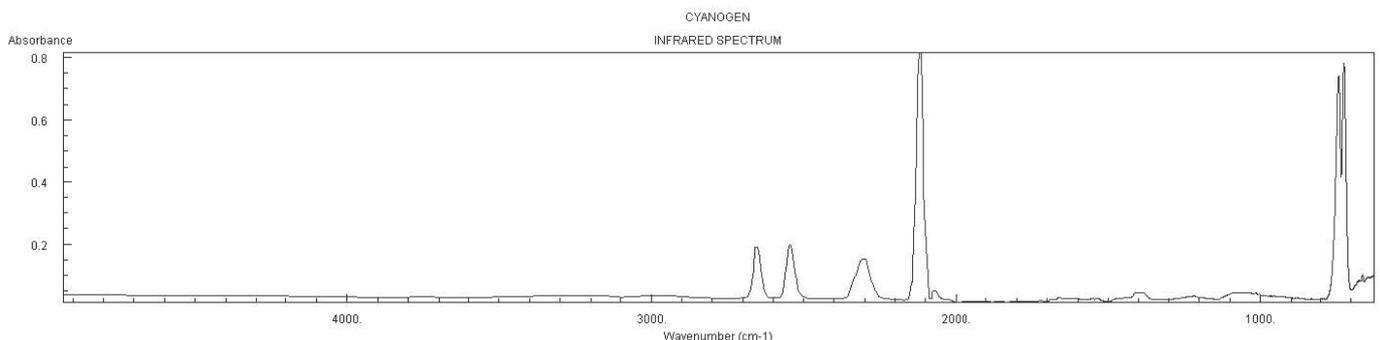

Versatile by design, the INNOVA 1412i can monitor almost any IR active gas. The target substances are selected by appropriate configuration of optical filters. The UA0984 filter is ideally centered at 2150cm-1 where the EDN shows an absorption peak.

[Infrared spectrum of Ethanedinitrile, originally edited and published by the Coblenz Society.]



INNOVA 1412i Photoacoustic Gas Monitor.

Our Solution

The Photoacoustic Gas Monitor INNOVA 1412i is a natural candidate for this type of trace gas monitoring needs in rugged environment and/or field conditions. It features excellent portability and once it has been set up for a specific monitoring task, it is easily operated with the push of a single start/stop button. It has very stable performances, and calibrations are only recommended twice a year.

Each gas monitor can be set up and calibrated for up to 5 different gases. Before testing with EDN, it had already been evaluated on an extensive list of fumigation substances:

Compound	Formula	Optical Filter	Detection limit (ppm)
Bromomethane	CH ₃ Br	UA0968	0.5
Chloropicrine	CCl ₃ NO ₂	UA0977	0.03
Ethylformate	C ₃ H ₆ O ₂	UA0974	0.4
Sulfuryl fluoride	SO ₂ F ₂	UA0979	0.9
Hydrogencyanide	HCN	UA0981	0.5
Phosphine	PH ₃	UA0936	0.5
Carbonylsulfide	COS	UA0978	0.6

Large dynamic ranges offered by the photoacoustic sensing technique will complement the low limits of detection: low exposure levels and broader fumigation process conditions can be monitored with a single instrument.

Measurement Results

The INNOVA 1412i was configured with the UA0984 filter, ideally centered at 2150 cm⁻¹ where the IR spectrum of EDN shows an absorption peak. The default configuration also enables the compensation from water vapor absorption.

Based on DIN 32645 evaluation methods, the detection limit for EDN is equal to 0.81 ppm for the INNOVA 1412i.

With possibility to configure 4 more optical filters in the same instrument, one can measure and compensate for CO₂ and HCN, or any other fumigant as listed above if needed in the user's applications.

Your Benefits

- ✓ Field deployable standalone monitor
- ✓ Highly sensitive on multiple targets: can monitor all major fumigation gases
- ✓ Simple operation adapted for non-experts
- ✓ Stable and reliable measurement with very limited maintenance required
- ✓ Measurement log stored in internal memory with easy export for reporting purposes

Contact your LumaSense applications engineering representative for more details on integrated solutions.

LumaSense Technologies

Awakening Your 6th Sense

Americas and Australia
Sales & Service
Santa Clara, CA
Ph: +1 800 631 0176
Fax: +1 408 727 1677

Europe, Middle East, Africa
Sales & Service
Frankfurt, Germany
Ph: +49 69 97373 0
Fax: +49 69 97373 167

India
Sales & Support Center
Mumbai, India
Ph: +91 22 67419203
Fax: +91 22 67419201

China
Sales & Support Center
Shanghai, China
Ph: +86 133 1182 7766
Ph: +86 21 5877 2383

info@lumasenseinc.com

LumaSense Technologies, Inc., reserves the right to change the information in this publication at any time.

www.lumasenseinc.com

©2016 LumaSense Technologies. All rights reserved.
App Note - Fumigant Monitoring - Rev. 06/27/16